



CITY OF BROADVIEW HEIGHTS
RESOLUTION NO. 2025-33

INTRODUCED BY MAYOR AND ENTIRE COUNCIL

**A RESOLUTION AUTHORIZING THE MAYOR TO ENTER INTO AN AGREEMENT
BETWEEN THE CITY OF BROADVIEW HEIGHTS AND CONCORD ROAD
EQUIPMENT, MFG. FOR THE PURCHASE OF A FREIGHTLINER PLOW TRUCK IN
THE CITY OF BROADVIEW HEIGHTS AND DECLARING AN EMERGENCY**

WHEREAS, the City Council has determined that it is in the best interest of the City to enter into an agreement between the City of Broadview Heights and Concord Road Equipment, MFG. for the purchase of a freightliner plow truck in the City of Broadview Heights.

NOW, THEREFORE, BE IT RESOLVED BY THE COUNCIL OF THE CITY OF BROADVIEW HEIGHTS, COUNTY OF CUYAHOGA AND STATE OF OHIO:

SECTION 1. The Mayor is hereby and herein authorized to enter into an agreement between the City of Broadview Heights and Concord Road Equipment, MFG. for the purchase of a freightliner plow truck in the City of Broadview Heights as delineated in Exhibit "A" attached hereto and made a part hereof as if fully rewritten.

SECTION 2. This Resolution is hereby declared to be an emergency measure necessary for the immediate preservation of the public health, peace, safety and welfare for the reason stated in the Preamble hereof, and provided it receives the affirmative vote of five (5) or more of the members of Council and signature of the Mayor; otherwise it shall take effect and be in force from and after the earliest period allowed by law.

Passed and Adopted by the Council on this 10th day of February, 2025



Robert Boldt, President of Council



Samuel J. Alai, Mayor

February 10, 2025

Date



Attest: Robin Parsons, Clerk of Council

February 10, 2025

Date

To: Mayor and City Council

From: David Schroedel, Dir. Of Public Service

Re: New Plow Truck Purchase

Attached are quotes for three different trucks.

1. 2024 Freightliner 2024/2025 Single Axle with buildout \$239, 629.72

Purchased from Concord Road Equipment

Breakdown – Chassis \$114,228 Buildout \$125,401

Truck is ready to go once the plow, auger and salt spinner are installed (2 week lead time)

2. Kenworth 2025 single axle with buildout \$258,800

Kenworth of Richfield

Truck is ready to go once the plow, auger and salt spinner are installed (2-4 week lead time)

On Sourcewell contract

3. Peterbilt 2024 Chassis ONLY on ground in Columbus \$143,162

On Sourcewell contract

Unit would need dump & plow buildout by a separate vendor. Buildout quote has not arrived in time. Estimate \$125,000

I am recommending the purchase of the Freightliner from Concord from the **Ohio DAS Contract Pricing #800925 Index #STS515**. We can also get a one half of one percent discount if paid within 20 days of receipt. The quote includes 8 hours of system and calibration training. Warranty is 5 years, first 3 years at 100% parts and labor, 2 years at 50% labor. Some item warranties on the truck may exceed that and those warranties would still be in effect. We have utilized Concord in the past and their quality and service has been excellent.



8200 Tyler Blvd. Suite H, Mentor, OH 44060
 PHONE: (440) 357-5344 FAX: (440) 357-1942
 concordroadequipment.com

$\$240,121.68 - \$491.96 = \$239,629.72$
 = Truck, plow, Auger/spinner & Poly Fenders
 Quote 90274

Quote Valid for 90 Days

Terms: NET 30

Page 1 of 10

Submitted To: BROADVIEW HEIGHTS, CITY OF 9543 BROADVIEW RD BROADVIEW HEIGHTS, OH 44147	Date: 1/17/2025
Phone: (440) 526-4357	End User: SERVICE DEPARTMENT
Fax: (440) 717-4004	Attention: DARRIN KWIATKOWSKI
	Delivery: SEE BELOW DELIVERY NOTES
	County: CUYAHOGA
	Acct Mgr: JEFFERY S. WARFIELD

FREIGHTLINER 108SD "PLUS" SINGLE AXLE CLASS 8 CAB AND CHASSIS WITH BASE INSTALLED CONCORD ROAD EQUIPMENT MFG., LLC DUMP BODY/SNOW AND ICE CONTROL EQUIPMENT PACKAGE

BASE 2024/2025 FREIGHTLINER 108SD "PLUS" SINGLE AXLE CAB AND CHASSIS

General Chassis Specifications

- Freightliner 108SD Plus 4x2 Vocational Cab/Chassis
- 41,000 GVWR
- 18,000 lb. front axle
- 23,000 lb. rear axle
- 80,000 lb. G.C.W. (gross combined weight)
- 153.5 inch wheelbase
- 85.0 inch CA (effective cab to axle)
- 127.0 inch bumper to back of cab
- Cummins L9 Engine
- 350 horsepower @ 2,200 rpm
- 1,050 lbs./ft torque @ 1,200 rpm
- Allison 3000RDS 6-Speed Transmission w/transmission PTO provision
- Front Detroit DA-F-18.0-5 18,000 lb. drop axle
- Front 18,000 lb. flat leaf springs with shock absorbers
- Two (2) front Michelin X Works 315/80R22.5 20 Ply tires
- TRW THP-60 Power Steering with RCH45 auxiliary gear
- Rear 23,000 lb. Cummins/Meritor RS-23-160 axle with differential lock
- Rear 30,000 lb. flat leaf spring suspension
- Four (4) rear Michelin Multi D+ 11R22.5 20 ply tires
- 7/16 inch x 3-9/16 inch x 11-1/8 inch 120ksi frame rails

- DETAILED TECHNICAL CHASSIS SPECIFICATIONS AVAILABLE UPON REQUEST

DUMP BODY AND HOIST

- Concord "PATRIOT SDS" Series- General
 - 304-2B stainless steel Construction
 - 10 foot inside floor length
 - 84 inch inside floor width
 - 96 inch outside body width
 - 6.48-8.21 struck cubic yard capacity
- Dump Body Sides
 - All 7 gauge 304-2B stainless steel construction

QUOTE CONTINUED ON NEXT PAGE



Quote 90274

8200 Tyler Blvd. Suite H, Mentor, OH 44060
PHONE: (440) 357-5344 FAX: (440) 357-1942
concordroadequipment.com

Quote Valid for 90 Days

Terms: NET 30

Page 2 of 10

Submitted To: BROADVIEW HEIGHTS, CITY OF 9543 BROADVIEW RD BROADVIEW HEIGHTS, OH 44147	Date: 1/17/2025
Phone: (440) 526-4357	End User: SERVICE DEPARTMENT
Fax: (440) 717-4004	Attention: DARRIN KWIATKOWSKI
	Delivery: SEE BELOW DELIVERY NOTES
	County: CUYAHOGA
	Acct Mgr: JEFFERY S. WARFIELD

QUOTE CONTINUED FROM PREVIOUS PAGE

- 30-inch-tall (inside floor to top of tailgate)
- Fully boxed dirt shedding top rails
- Integral dirt shedding lower rub rails
- Full length integral formed intermediate horizontal brace
- Front body corner brace
- Full depth rear corner pillar with sloping dirt shedding top caps
- ½ inch thick 304 stainless steel self-aligning tailgate upper hinge plates
- Dump Body Tailgate
 - 38-inch-tall (inside floor to top of tailgate)
 - 7 gauge 304-2B stainless steel construction
 - **Six (6) panel style bracing**
 - Fully boxed perimeter with dirt shedding top and bottom rails
 - One (1) intermediate dirt shedding horizontal brace
 - Two (2) intermediate vertical rails
 - One (1) center inline type sliding patch gates
 - Heavy-duty 1-inch-thick stainless steel "plate" upper offset hinge hardware
 - 1-1/2-inch diameter stainless steel upper tailgate pins with grease zerks
 - Heavy-duty 1-inch-thick stainless steel "plate" lower latching fingers
 - 1-1/2-inch diameter stainless steel lower tailgate latching pins
 - Air operated release mechanism with cylinder located vertically in rear dump body corner post
 - Lifting ring, stainless steel-center of dump body
- Dump Body Bulkhead
 - 7 gauge 304-2B stainless steel front bulkhead
 - Three (3) bend formed horizontal top rail
 - One (1) additional horizontal intermediate bracing
- Dump Body Floor & Understructure
 - Crossmemberless western style "smooth bottom" understructure
 - Floor constructed of 1/4-inch AR-400 abrasion and impact resistant 180kpsi steel floor
 - Structural steel I-Beam body longitudinals constructed
- Dump Body Hoist
 - Telescopic with three (3) active stages
 - 91.00 inch overall stroke
 - Power up and power down on all stages
 - Rated at 29.8-ton dumping capacity in this configuration
 - 50-degree dump angle in this configuration
 - Heavy-duty greaseable rear hinge assembly
 - One (1) safety body prop
- Dump Body Cab Shield
 - 24-inch 7 gauge 304-2B stainless steel

QUOTE CONTINUED ON NEXT PAGE



Quote 90274

8200 Tyler Blvd. Suite H, Mentor, OH 44060
PHONE: (440) 357-5344 FAX: (440) 357-1942
concordroadequipment.com

Quote Valid for 90 Days

Terms: NET 30

Page 3 of 10

Submitted To: BROADVIEW HEIGHTS, CITY OF 9543 BROADVIEW RD BROADVIEW HEIGHTS, OH 44147	Date: 1/17/2025
Phone: (440) 526-4357	End User: SERVICE DEPARTMENT
Fax: (440) 717-4004	Attention: DARRIN KWIATKOWSKI
	Delivery: SEE BELOW DELIVERY NOTES
	County: CUYAHOGA
	Acct Mgr: JEFFERY S. WARFIELD

QUOTE CONTINUED FROM PREVIOUS PAGE

- Load bearing type
- Cabshield welded to front body bulkhead
- Provisions for forward, side, and rear facing warning lamps
- Body Passivation
 - All dump body stainless steel welds to receive "chemical passivation" to remove free iron surface contamination and to promote the formation of chromium-nickel oxide protective barrier
 - Dump body exterior left in natural 2B stain stainless steel finish

CHASSIS AND DUMP BODY RELATED COMPONENTS

- Pintle Tow Hitch Plate
 - Rear chassis frame-mounted 3/4-inch-thick steel towing plate
 - Provision for recessed trailer plug receptacle
 - 55 degree offset lashing safety D-rings
 - Tow plate recessed 3 inches to allow for clearance between pintle hook and UTG spreader when installed
- Pintle Hook
 - 20 ton capacity pintle towing hook
 - 8,000 lb. maximum vertical load
 - 40,000 lb. maximum towing capacity
- Mud Flaps & Brackets
 - Rear mud flaps with stainless steel quick pin mounting hardware behind rear chassis duals
 - Stainless steel shields with 1/2 size mud flaps in front of chassis duals
- Dump Body Mounted Steps/Rungs
 - Two (2) dump body mounted step rungs
 - All stainless-steel construction
 - Serrated step rung style
 - Rungs mounted on street side of dump body, one above the other
 - Vertical grab handles, stainless steel, one (1) each fore/aft of body mounted rungs
- Dump Body Mounted Ladder
 - One (1) fold-up stow-away type
 - All stainless-steel construction
 - Three (3) serrated step rungs
 - Ladder installed below dump body mounted steps
- Hardwood Sideboards
 - Nominal 2 inches thick by 8 inches tall
 - Painted "white"
 - Installed on top of body sides in front and rear corner sideboard pockets
- Tailgate Lifting Ring
 - Stainless steel construction

QUOTE CONTINUED ON NEXT PAGE



Quote 90274

8200 Tyler Blvd. Suite H, Mentor, OH 44060
PHONE: (440) 357-5344 FAX: (440) 357-1942
concordroadequipment.com

Quote Valid for 90 Days

Terms: NET 30

Page 4 of 10

Submitted To: BROADVIEW HEIGHTS, CITY OF 9543 BROADVIEW RD BROADVIEW HEIGHTS, OH 44147	Date: 1/17/2025
Phone: (440) 526-4357	End User: SERVICE DEPARTMENT
Fax: (440) 717-4004	Attention: DARRIN KWIATKOWSKI
	Delivery: SEE BELOW DELIVERY NOTES
	County: CUYAHOGA
	Acct Mgr: JEFFERY S. WARFIELD

QUOTE CONTINUED FROM PREVIOUS PAGE

- Mounted center upper rail of tailgate
- Conspicuity Tape System
 - Alternating DOT red and white reflective
 - Lower vertical face of body rub rails
 - Tailgate perimeter bracing

FORCE AMERICA SIX (6) CIRCUIT CENTRAL HYDRAULIC SYSTEM

- System Hydraulic Pump
 - Force America No. 1063355
 - Load sensing axial piston pump
 - Hydra Leduc -1063355/CFG-999182
 - DIN input shaft
 - 5.61 cubic inch displacement 24.29 gpm @ 1000 rpm
- Power Take-off
 - Transmission mounted Hotshift Power take-off
 - Extension housing DIN output shaft that locates the hydraulic pump behind the transmission for ease of maintenance
 - Wet spline, Allison transmission, left side mount, 97% ratio
- Low Hydraulic Oil Level Auto Shutdown System
 - Interrupts (de-energizes) transmission mounted hotshift pto circuit should a low hydraulic oil situation arise
 - Hydraulic reservoir mounted oil level sensor
 - In chassis cab warning indicator lamp with audible warning buzzer
 - Momentary override switch to allow stowing of deployed ancillary equipment
- System Hydraulic Control Valve
 - Force America No. 1090630
 - Six (6) circuit/function Add-A-Stack 4020 Load sensing hydraulic directional control valve
 - One (1) double-acting hoist raise / lower circuit (pneumatic /air shifted)
 - One (1) double-acting snowplow lift cylinder circuit (pneumatic/air shifted)
 - One (1) double-acting proportional snowplow power angle circuit (pneumatic/air shifted)
 - One (1) single acting granular materials spreader conveyor/auger circuit (12v PWM)
 - One (1) single acting granular materials spreader spinner circuit (12v PWM)
 - One (1) single acting granular materials spreader liquid prewet circuit provision only
 - Entire valve assembly chassis frame mounted in a chassis frame mounted enclosure
- Hydraulic Oil Reservoir
 - Force America No. 1097337
 - Combination hydraulic oil reservoir with integral valve enclosure
 - Filler breather cap
 - Sight level/temperature gauge
 - Magnetic drain plug

QUOTE CONTINUED ON NEXT PAGE



Quote 90274

8200 Tyler Blvd. Suite H, Mentor, OH 44060
PHONE: (440) 357-5344 FAX: (440) 357-1942
concordroadequipment.com

Quote Valid for 90 Days

Terms: NET 30

Page 5 of 10

Submitted To: BROADVIEW HEIGHTS, CITY OF 9543 BROADVIEW RD BROADVIEW HEIGHTS, OH 44147	Date: 1/17/2025 End User: SERVICE DEPARTMENT Attention: DARRIN KWIATKOWSKI Delivery: SEE BELOW DELIVERY NOTES County: CUYAHOGA
Phone: (440) 526-4357 Fax: (440) 717-4004	Acct Mgr: JEFFERY S. WARFIELD

QUOTE CONTINUED FROM PREVIOUS PAGE

- Suction port system service ball valve
- Hydraulic oil filter, cartridge type
- One (1) spare filter element
- Hydraulic reservoir mounted oil level and temperature sensor
- System Return Line Manifold
 - Single point return line manifold assembly
 - All hydraulic system return lines enter manifold and exit one (1) common line to hydraulic oil reservoir return flow filter head assembly
- System Operator Controls- Dump Body Hoist and Snowplow (cylinder circuits)
 - Force America No. 1090630 in chassis cab pneumatic joystick adjustable control tower
 - One (1) #1029363 single axis metering center lock joystick controller for dump body hoist "raise and lower"
 - One (1) #1029327 dual axis joystick controller snowplow "raise and lower" and "power angle left and right"
 - Control tower includes low hydraulic oil override switch
- System Operators Controls- Granular and Liquid Materials (motor circuits)
 - Force America No. 1179322 "Open Loop" granular/liquid prewet controller
 - Model 5100EX
 - Multi-mode/multi materials functionality
 - Ground speed proportional operation
 - Data logging capabilities
 - Operator control of auger/conveyor output (speed), spinner speed, and liquid prewet
 - Tracks, stores, and reports materials usage, and systems event data
 - USB supervisor's controller key, #1095378
- System Snowplow Power Reversing Cylinder Protection
 - Cross over relief valve mounted at front of chassis for plow power angle circuit protection
- System Hydraulic Plumbing
 - Stainless steel rigid intermediate hydraulic tubing with short hydraulic whip hoses for all spreader connections at the rear of the chassis
 - Stainless steel rigid intermediate hydraulic tubing with short hydraulic whip hoses for all snowplow connections at front of chassis
 - All required hydraulic hoses, fittings, stainless steel quick couplers, filters, oil, etc., to make a complete, fully tested, calibrated, and operational six (6) circuit/function FORCE AMERICA load sensing central hydraulic system.

BASE ELECTRICAL AND LIGHTING SYSTEMS

- System Power Distribution Center
 - In-cab power distribution panel for all body related electrical circuitry
 - All components mounted to an aluminum distribution panel
 - Clear poly cover and color-coded circuit diagram affixed for quick referencing of all body related electrical circuitry
- System Dump Body "UP" Operators Warning

QUOTE CONTINUED ON NEXT PAGE



Quote 90274

8200 Tyler Blvd. Suite H, Mentor, OH 44060
PHONE: (440) 357-5344 FAX: (440) 357-1942
concordroadequipment.com

Quote Valid for 90 Days

Terms: NET 30

Page 6 of 10

Table with 2 columns: Submitted To (BROADVIEW HEIGHTS, CITY OF) and Date (1/17/2025). Includes contact info for Acct Mgr: JEFFERY S. WARFIELD.

QUOTE CONTINUED FROM PREVIOUS PAGE

- Remote sealed proximity switch trigger activated
• In chassis armrest operator warning light
• System Stop/Tail/Turn and Backup Lights
• System Work/Spreader Lights
• Electronic Brake Controller
• Snowplow Lights
• Back Up Alarm
• Standard FMVSS 108 lighting, LED type
• Base System Wiring and Connections

BASE WARNING LIGHT SYSTEM- SIX (6) HEAD AMBER

- Warning Lights-Dump Body Cabshield Mounted
• Four (4) Total
• Buyers Products BPC SL62CA Rubber Grommeted Amber LED/Amber Lens

QUOTE CONTINUED ON NEXT PAGE



Quote 90274

8200 Tyler Blvd. Suite H, Mentor, OH 44080
PHONE: (440) 357-5344 FAX: (440) 357-1942
concordroadequipment.com

Quote Valid for 90 Days
Terms: NET 30
Page 7 of 10

Submitted To: BROADVIEW HEIGHTS, CITY OF
Date: 1/17/2025
End User: SERVICE DEPARTMENT
Attention: DARRIN KWIATKOWSKI
Delivery: SEE BELOW DELIVERY NOTES
County: CUYAHOGA
Acct Mgr: JEFFERY S. WARFIELD
Phone: (440) 526-4357 Fax: (440) 717-4004

QUOTE CONTINUED FROM PREVIOUS PAGE

- 5- year warranty
Warning Lights- Rearward Facing, Dump Body Rear Corner Pillars
Two (2) Total
Buyers Products BPC SL62CA Rubber Grommited Amber LED/Amber Lense
One (1) each installed REAR FACING STREET SIDE rear corner post of dump body
One (1) each installed REAR FACING CURB SIDE rear corner post of dump body
5- year warranty
Warning Lights-Forward Facing, Plow Lights Bracket Mounted
None Included
Warning Light Control/Switching
When applicable, all lights controlled via OEM dash mounted switches
Forward, side, and rear facing switch separately
System Wiring and Connections
All required wiring, wiring harnesses, Deutsch or equal sealed weatherproof connections, etc. for a complete and fully functional warning light system

CHASSIS MOUNTED SNOWPLOW HITCH

- Concord TTN-400CL SERIES
Heavy-duty low-profile chassis mounted front snowplow hitch
1/2 inch formed steel channel H-frame uprights
1/2 inch wall structural steel tubing top horizontal
1/2 inch upper H-frame lift cap pivot ears
Pivot ears include DOM steel tubing bushings with grease zerks
Heavy Duty Lift Cap
Lift cap constructed of 1/2 inch steel plate
Steel square tubing lift arm receiver
Receiver includes provisions for adjusting lift arm length
Telescopic Adjustable Lift Arm
Telescopic lift arm constructed of 3/8-inch x 3.0-inch x 3.0-inch structural steel tubing
Lifting tube thru drilled to allow various plow lift lengths
Outboard lift arm includes both dual chain lift eyes and bottom clevis lifting point
Entire lift cap and telescopic lift arm folds down for storage
Hydraulic Lift Ram
4 x 6-inch double acting lift ram
Corrosion resistant nitrated cylinder rod
Hitch to Chassis Mounting
Chassis specific mounting with 5/8-inch-thick steel push plates
Push plates additionally reinforced with full 90 degree opposing "pass through" gusseting

QUOTE CONTINUED ON NEXT PAGE



Quote 90274

8200 Tyler Blvd. Suite H, Mentor, OH 44060
PHONE: (440) 357-5344 FAX: (440) 357-1942
concordroadequipment.com

Quote Valid for 90 Days

Terms: NET 30

Page 8 of 10

Submitted To: BROADVIEW HEIGHTS, CITY OF
Date: 1/17/2025
End User: SERVICE DEPARTMENT
Attention: DARRIN KWIATKOWSKI
Delivery: SEE BELOW DELIVERY NOTES
County: CUYAHOGA
Acct Mgr: JEFFERY S. WARFIELD
Phone: (440) 526-4357 Fax: (440) 717-4004

QUOTE CONTINUED FROM PREVIOUS PAGE

- All hitch mounting fasteners are Grade 8 flanged stover locking nuts
Hitch assembly includes heavy duty formed channel swept back bumpers
Snowplow Quick Attach/Detach Coupler
Drop pin loop type
Center single drop pin style
Drop pin 2-1/2 inches in diameter
Pin easily raised and lower with off-set pivot lift arm
Entire assembly welded to bottom of hitch H-lift frame assembly
Hitch Bumpers
Two (2) piece design, one (1) streetside x one (1) curbside
Constructed of 1/4 inch formed channel
Constructed of 1/4-inch steel plate
Cast balls feet-pipe strut braces
Each strut brace extends from approximate center of bumper to H-lift frame cheek mounting plates
Prep and Painting
Entire hitch assembly Tuff Kote 4-step powder coat painting processing and powder coated gloss black.

YOUR TOTAL NET BASE COST PER AVAILABLE UNIT \$216,179.08 EACH

See Revised Quote - Last page

ITEMIZED OPTIONS TO CONSIDER

To Be Adjusted to 10'

Itemized Option #1- Buyers Super J Model #1663530311 Heavy Duty Snowplow

- Snow Plow Moldboard -11 feet long x 42 inch tall, UHPM heavy duty poly moldboard, mailbox cut on curb side of moldboard; Ten (10) 1/2-inch vertical moldboard ribs; Safety Trip Edge Mechanism- Torsion spring type, five (5) 3/4-inch square spring, 1 1/4-inch schedule 80 torque tube, 3/4 x 4-inch x 4-inch lower backer angle, 5/8-inch carbon steel cutting edge; Push Frame- constructed of 4 x 4-inch square tubular push frame, four (4) moldboard connection points, 1 1/4-inch diameter connection pins, 2-inch x 2-inch tubing adjustable moldboard attach angling struts; Reversing Drive Frame- Single acting hydraulic ram reversing cylinders, 4 inch bore x 3-inch rod x 16-inch stroke, 2 1/2-inch diameter push to reversing frame pivot pin with replaceable bushings; Snowplow Hitch Coupler-Snowplow halve drop pin loop quick attach/detach; Miscellaneous Snowplow Related-Full length rubber snow deflector, parking jack, 36-inch moldboard markers, hookup hoses with stainless steel couplers

Your Total Net Installed Price Each \$ 16,998.63

Itemized Option #2- Buyers Products #92420SSA Undertailgate Granular Materials Spreader

- Spreader Hopper- all 304 stainless steel construction, hinged trough drop bottom with standard offset discharge port, hinged dump over cover; Auger Delivery System- Single 6-inch diameter auger, auger direct driven via high torque hydraulic motor, auger and motor coupled via poly coupler for ease of maintenance, anti-spill plate over trough discharge; Spinner/Sander Assembly- 18-inch diameter spinner disk constructed of molded polyurethane, stainless steel adjustable spinner bracket, adjustable stainless steel spinner deflector, spinner bracket leveling kit; Misc. Spreader Related- Tailgate spreader enclosures, EZ-latch finger and pin mounted type for ease of removal/installation; Hydraulic hookup hose assemblies; Stainless steel quick couplers; Stainless steel slide arm and pocket mounting hardware

QUOTE CONTINUED ON NEXT PAGE



Quote 90274

8200 Tyler Blvd. Suite H, Mentor, OH 44060
PHONE: (440) 357-5344 FAX: (440) 357-1942
concordroadequipment.com

Quote Valid for 90 Days
Terms: NET 30
Page 9 of 10

Submitted To: BROADVIEW HEIGHTS, CITY OF
Date: 1/17/2025
End User: SERVICE DEPARTMENT
Attention: DARRIN KWIATKOWSKI
Delivery: SEE BELOW DELIVERY NOTES
County: CUYAHOGA
Acct Mgr: JEFFERY S. WARFIELD
Phone: (440) 526-4357 Fax: (440) 717-4004

QUOTE CONTINUED FROM PREVIOUS PAGE

- Itemized Option #3- Add Dump body electric operated vibrator kit
Itemized Option #4- Add patchgate in body tailgate with inline handle
Itemized Option #5- Add Poly fenders with stainless steel mounting over rear duals
Itemized Option #6- Add Tool/Shovel Holder, spring loaded stainless steel clamping style, per each requested
Itemized Option #7-Add manual snowplow hydraulic circuit pressure relief valve, chassis plow hitch mounted
Itemized Option #8-Add Snowplow Balance/Power Float System, includes Force America hydraulic power float manifold; Power float deactivation/air kit; Additional required hydraulic hose assemblies and electrical harnesses

INCLUDED TRAINING AND SYSTEMS CALIBRATIONS

- At NO charge to the customer, Concord Road Equipment Mfg., LLC and/or its affiliates, will provide up to a total of eight (8) hours of operators and service technicians system operations and calibrations training.
Customer, when applicable, to provide all granular and/liquid materials required for spreader controls calibrations and training
Training cannot be spread out over more than two (2) onsite days. Example: Two days for 4 hrs./day. Additional training requests above/beyond the included eight (8) hours will be invoiced at normal hourly rates which currently are \$140.00 per person hour.

PAYMENT DISCOUNTS

Per our Ohio Department of Administrative Services Contract Schedule #800925, Index #STS515, an additional 0.5% (one-half of one percent) discount is available for payment(s) of invoice(s) within twenty (20) days of receipt. A payment discount will be noted on the invoice(s).

WARRANTY INFORMATION

*Concord Road Equipment Mfg., LLC. Truck equipment packages include parts and labor warranty for a total period of FIVE (5) YEARS; first thirty-six (36) months at 100% parts and labor on all workmanship, second twenty-four (24) months at 50% labor only. Other suppliers/component warranties that exceed Concord Road Equipment Mfg., LLC base warranty will remain in effect. All warranty periods begin after completion/delivery of equipment, components, and accessories. When applicable, Concord "Titan" series snowplow hitches carry 100% parts and labor warranty structural components for five (5) years. When applicable, TBEI series dump body hoists have manufacturer warranty coverage - first 36 months at 100% parts and labor. Warranties do not include typically considered wear and maintenance items (such as plow blades, augers, conveyor chains, hydraulic couplers, filters, spinner drive hydraulic motors, spinner disks, chains, sprockets, bearings, etc.); Routine adjustments and calibrations; Abuse, neglect, misuse, and improper operation; Lack of maintenance (including component corrosion); Inspections, and training; Any consequential damages as a result thereof. Under the warranty period, Concord Road Equipment Mfg., LLC reserves the right to replace, repair, rebuild, or substitute with like equipment, components, and parts at its sole discretion.

*Optional Extended Chassis Warranty(s) Available through Valley Freightliner Western Star

QUOTE CONTINUED ON NEXT PAGE



Quote 90274

8200 Tyler Blvd. Suite H, Mentor, OH 44060
PHONE: (440) 357-5344 FAX: (440) 357-1942
concordroadequipment.com

Quote Valid for 90 Days

Terms: NET 30

Page 10 of 10

Submitted To: BROADVIEW HEIGHTS, CITY OF
Date: 1/17/2025
End User: SERVICE DEPARTMENT
Attention: DARRIN KWIATKOWSKI
Delivery: SEE BELOW DELIVERY NOTES
County: CUYAHOGA
Acct Mgr: JEFFERY S. WARFIELD
Phone: (440) 526-4357 Fax: (440) 717-4004

QUOTE CONTINUED FROM PREVIOUS PAGE

ESTIMATED DELIVERY PERIOD

Currently there are four (4) "ready for work" In Stock Freightliner 108SD Plus single axle cab chassis with base dump body snow and ice control equipment packages available. With any requested changes/upgrades, delivery of an available stocking unit is approximately 4-6 weeks after receipt of a signed sales quotation and valid purchase order. *Available units subject to previous sale

*Freightliner 108SD Plus Chassis(s) provided by Valley Freightliner WesternStar
*Dump Body/Snow and Ice Control Package Provided by Concord Road Equipment Mfg., LLC Ohio Department of Administrative Services Index #STS515, Schedule #900116

INSURANCE

When applicable, your chassis and/or equipment are insured while in Concord Road Equipment's Mfg., LLC possession. This includes all properties, buildings, lots, etc. A copy of our complete "LIMITED LIABILITY" garage-keepers insurance policy is available upon request.

Authorized by [Signature]
JEFFERY S. WARFIELD

I /We hereby accept the above quotation including all terms and conditions, and place an order for the proposed item(s) on 2/10/2025
(today's date) for a total amount of \$ (please include selected options, if applicable).

Accepted By [Signature]

All material is guaranteed to be as specified. All work to be completed in a workmanlike manner according to standard practices. Any alteration or deviation from the above specifications involving extra costs will be executed only upon written orders and will become an extra charge over and above the estimate. All agreements are contingent upon strikes, accidents, or delays beyond our control. Owner is to carry fire, tornado and other necessary insurance. Our workers are fully covered by Worker's Compensation. A 3% surcharge will be added to above total when paying by credit card.



Quote 90274

8200 Tyler Blvd. Suite H, Mentor, OH 44060
PHONE: (440) 357-5344 FAX: (440) 357-1942
concordroadequipment.com

Quote Valid for 90 Days
Terms: NET 30
Page 8 of 10

Submitted To: BROADVIEW HEIGHTS, CITY OF
Date: 1/22/2025
End User: SERVICE DEPARTMENT
Attention: DARRIN KWIATKOWSKI
Delivery: SEE BELOW DELIVERY NOTES
County: CUYAHOGA
Acct Mgr: JEFFERY S. WARFIELD
Phone: (440) 526-4357 Fax: (440) 717-4004

QUOTE CONTINUED FROM PREVIOUS PAGE

- All hitch mounting fasteners are Grade 8 flanged stover locking nuts
Hitch assembly includes heavy duty formed channel swept back bumpers
Snowplow Quick Attach/Detach Coupler
Drop pin loop type
Center single drop pin style
Drop pin 2-1/2 inches in diameter
Pin easily raised and lower with off-set pivot lift arm
Entire assembly welded to bottom of hitch H-lift frame assembly
Hitch Bumpers
Two (2) piece design, one (1) streetside x one (1) curbside
Constructed of 1/4 inch formed channel
Constructed of 1/4-inch steel plate
Cast balls feet-pipe strut braces
Each strut brace extends from approximate center of bumper to H-lift frame cheek mounting plates
Prep and Painting
Entire hitch assembly Tuff Kote 4-step powder coat painting processing and powder coated gloss black

YOUR TOTAL NET BASE COST PER AVAILABLE UNIT \$216,179.08 EACH

ITEMIZED OPTIONS TO CONSIDER

Itemized Option #1- Buyers Super J Model #1662530311 Heavy Duty Snowplow


Snow Plow Moldboard-10 feet long x 42 inch tall, UHPM heavy duty poly moldboard, mailbox cut on curb side of moldboard; Ten (10) 1/2-inch vertical moldboard ribs; Safety Trip Edge Mechanism- Torsion spring type, five (5) 3/4-inch square spring, 1 1/4-inch schedule 80 torque tube, 3/4 x 4-inch x 4-inch lower backer angle, 5/8-inch carbon steel cutting edge; Push Frame- constructed of 4 x 4-inch square tubular push frame, four (4) moldboard connection points, 1 1/4-inch diameter connection pins, 2-inch x 2-inch tubing adjustable moldboard attach angling struts; Reversing Drive Frame- Single acting hydraulic ram reversing cylinders, 4 inch bore x 3-inch rod x 16-inch stroke, 2 1/2-inch diameter push to reversing frame pivot pin with replaceable bushings; Snowplow Hitch Coupler-Snowplow halve drop pin loop quick attach/detach; Miscellaneous Snowplow Related-Full length rubber snow deflector, parking jack, 36-inch moldboard markers, hookup hoses with stainless steel couplers

Your Total Net Installed Price Each \$ 16,506.67

Itemized Option #2- Buyers Products #92420SSA Undertailgate Granular Materials Spreader

Spreader Hopper- all 304 stainless steel construction, hinged trough drop bottom with standard offset discharge port, hinged dump over cover; Auger Delivery System- Single 6-inch diameter auger, auger direct driven via high torque hydraulic motor, auger and motor coupled via poly coupler for ease of maintenance, anti-spill plate over trough discharge; Spinner/Sander Assembly- 18-inch diameter spinner disk constructed of molded polyurethane, stainless steel adjustable spinner bracket, adjustable stainless steel spinner deflector, spinner bracket leveling kit; Misc. Spreader Related- Tailgate spreader enclosures, EZ-latch finger and pin mounted type for ease of removal/installation; Hydraulic hookup hose assemblies; Stainless steel quick couplers; Stainless steel slide arm and pocket mounting hardware

QUOTE CONTINUED ON NEXT PAGE

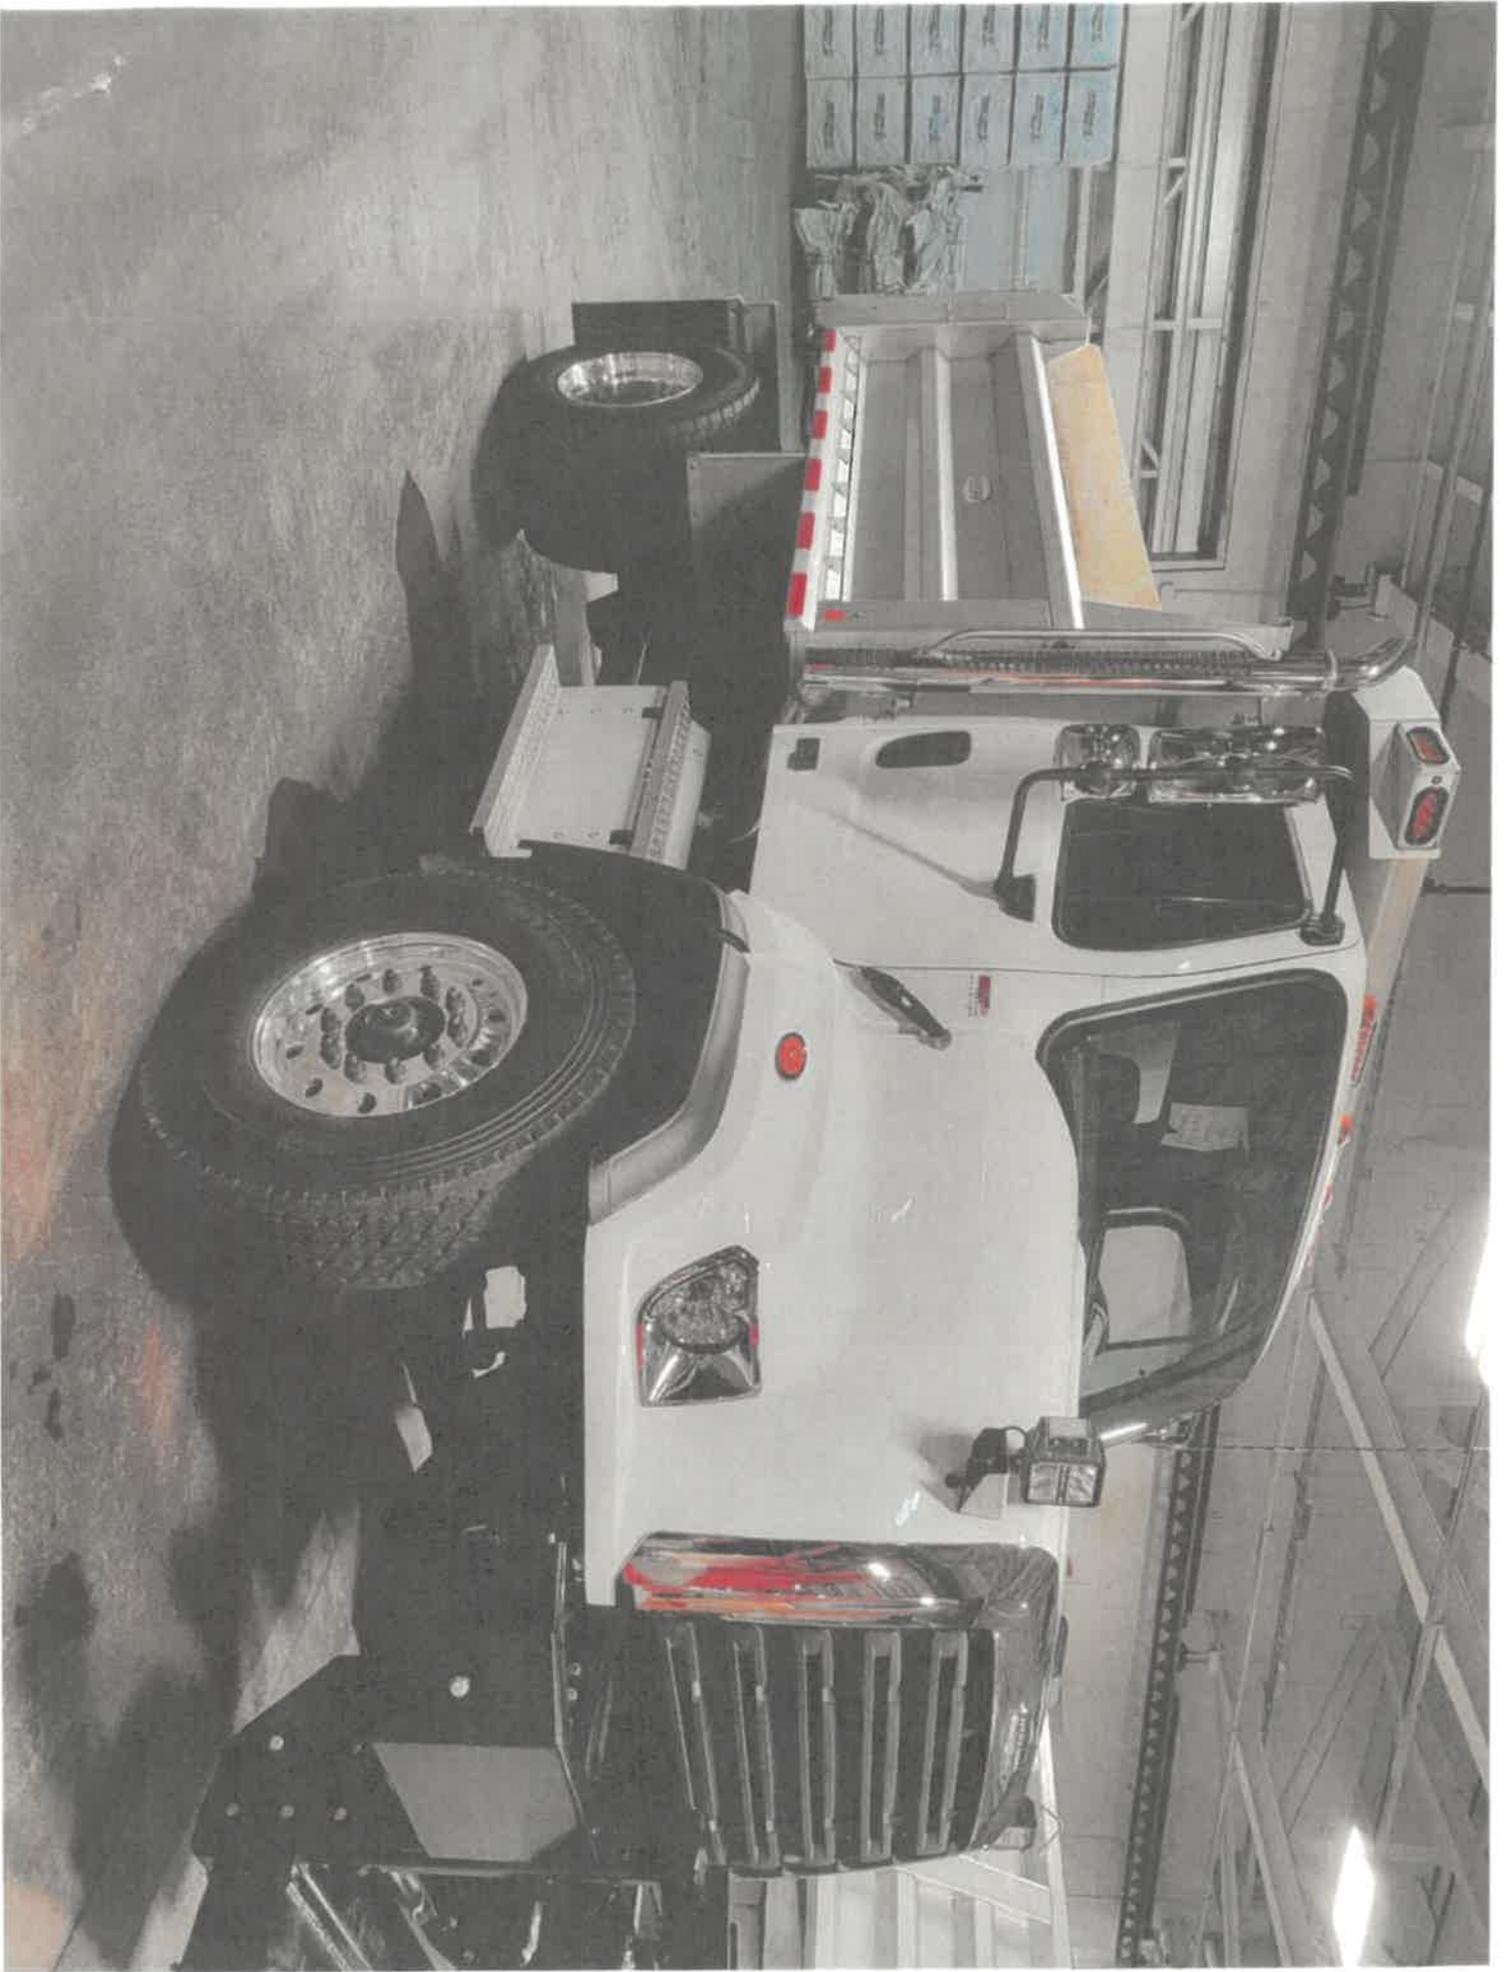



Kenworth of Richfield
 2890 Brecksville Rd
 Richfield, OH 44286
 Ph: 330-659-4123
 Fax: 330-659-4481
 Toll Free: 800-362-7490

Darrin Kwiatkowski
 City of Broadview Heights
 9543 Broadview Road 2nd Floor
 Broadview Hts. Ohio 44147

We are pleased to quote you on your 2025 Truck Purchase.
 Please see attached specifications for your review and consideration.

New 2025 Kenworth T480 Muni w/ ARM Snow and Ice Package per attached specifications:	\$237,600.00
12 mo/100k Base Warranty:	\$ Included
24 mo./250k/6250hrs. Base Engine Warranty:	\$ Included
5 yr/100k Protection Plan 1 Aftertreatment Warranty:	\$ Included

Total for a Kenworth T480 Muni w/ARM Snow and Ice package price:

\$237,600.00
 + 14,950.00 - plow
 + 6,250.00 - Auger/Spinner

Plow and Salt spreader sold separately.

This Truck is in stock and ready for Delivery.

Sourcewell Contract #032824-KTC Per attached specs.

\$ 258,800
 (+ Warranties?)

FRANCHISED DEALER OF KENWORTH TRUCKS AND SUBSIDIARY OF THE HISSONG GROUP FAMILY OF COMPANIES

KENWORTH OF RICHFIELD / KENWORTH OF CANTON / KENWORTH OF COLUMBUS
 KENWORTH OF ASHLAND / KENWORTH OF CHILLICOTHE / BROKERS INVESTMENT CORP.



Kenworth of Richfield
2890 Brecksville Rd
Richfield, OH 44286
Ph: 330-659-4123
Fax: 330-659-4481
Toll Free: 800-362-7490

OPTIONS

Extended Warranties –

Extended Base Warranty – 4 years/200,000 miles	\$1,095.00
5 years/200,000 miles	\$1,585.00
Extended Engine Warranty – 4 years/200,000 miles	\$2,570.00
5 years/200,000 miles	\$2,970.00
Extended Aftertreatment Warranty - 4 years/200,000 miles	\$1,100.00

Please call me on my cell with any questions,

Thank you,

Jim Watters
Kenworth of Richfield
330-957-3431 cell#
jwatters@hissongkw.com

FRANCHISED DEALER OF KENWORTH TRUCKS AND SUBSIDIARY OF THE HISSONG GROUP FAMILY OF COMPANIES

KENWORTH OF RICHFIELD / KENWORTH OF CANTON / KENWORTH OF COLUMBUS
KENWORTH OF ASHLAND / KENWORTH OF CHILLICOTHE / BROKERS INVESTMENT CORP.



3026 Saratoga Avenue
Canton, Ohio 44706

END USER	PAYMENT TERMS	LEAD TIME:	FREIGHT
Stock Truck add Ons	Net 30	ARO 6-8 Weeks	CPU

Part Number	ARM Snow Plow Specifications	
Base Snow Plow Spec Includes: 5" steel Tube Semi Circle, Formed Push Frame, (2) DA Reversing Cylinders, 8" X 1/2" standard punch cutting edge, Lift chains, End Markers, Rubber Snow Shield, Painted Orange face & Black Rear		
Trip Edge Snow plows- (5) Independent Torsion Trip Springs		
SPX-00000002	ARM 10'X 36" Trip Edge	\$14,663.00
* SPX-00000115	ARM 10'X 42" Trip Edge	\$14,950.00
SPX-00000143	ARM 11'X 36" Trip Edge	\$15,238.00
SPX-00000005	ARM 11'X 42" Trip Edge	\$15,525.00
SPX-00000060	ARM 12'X 36" Trip Edge	\$16,100.00
SPX-00000031	ARM 12'X 42" Trip Edge	\$16,675.00
Full Trip Snow plows-(2) External Trip Springs		
SPX-00000049	ARM 10'X 36" Full Trip	\$14,750.00
SPX-00000059	ARM 10'X 42" Full Trip	\$15,000.00
SPX-00000067	ARM 11'X 36" Full Trip	\$15,250.00
SPX-00000050	ARM 11'X 42" Full Trip	\$15,500.00
SPX-00000061	ARM 12'X 36" Full Trip	\$15,750.00
SPX-00000080	ARM 12'X 42" Full Trip	\$16,000.00
Snow plow Upgrade Options		
SPC-00000198	(1) set adjustable mushroom caster shoes	\$1,350.00
	(1) set adjustable 8" caster wheel assembly	\$1,375.00
	Curb Bumpers	\$330.00
	Flare snow plow ear (Driver or passenger Side)	\$825.00
	Substitute QCP for 20.5" Center Pin	\$485.00
	Substitute QCP for 30.5" Center Pin	\$525.00
MSC-00000274	Jack Stand	\$185.00

Part Number	ARM Spreader Specifications	
Base Spreaders & Pre-Wet systems reflect installed pricing: UTG Spreaders Includes Dump Bed Side spreader spill plates & SS hydraulic connections V-Box Spreaders include under spreader support & chain tie down/end point latch bar & SS hydraulic connections		
Under Tailgate Salt Spreaders--installed		
SSX-00000009	SS UTG Hydraulic Spreader: 6" auger w/ flighting /ext. side plates	\$6,250.00
SSX-00000010	SS UTG Hydraulic Spreader: 9" auger w/ flighting / ext. side plates	\$8,280.00
SSX-00000011	SS TG-505 Hydraulic Spreader & hinged hopper cover	\$7,500.00
V-Box Spreaders		
SSX-00000012	9ft SS V-Box-Conveyor Chain- 6 Cu. Yd. 25:1 ratio	\$26,968.00
SSX-00000013	10ft SS V-Box-Conveyor Chain- 9 Cu. Yd. 25:1 ratio	\$27,715.00
SSX-00000014	12ft SS V-Box-Conveyor Chain- 11 Cu. Yd. 25:1 ratio	\$28,980.00
SSX-00000015	14ft SS V-Box-Conveyor Chain- 14 Cu. Yd. 25:1 ratio	\$31,165.00
SSX-00000016	10ft SS V-Box-Single Drive Auger- 7 Cu. Yd. 25:1 ratio	\$27,244.00
SSX-00000017	11ft SS V-Box-Single Drive Auger- 8 Cu. Yd. 25:1 ratio	\$30,188.00
SSX-00000018	12ft SS V-Box-Single Drive Auger- 9 Cu. Yd. 25:1 ratio	\$31,625.00
SSX-00000019	14ft SS V-Box-Single Drive Auger- 10 Cu. Yd. 25:1 ratio	\$37,663.00
SSX-00000020	10ft SS V-Box-Dual Drive Auger- 7 Cu. Yd. 25:1 ratio	\$31,493.00
SSX-00000021	11ft SS V-Box-Dual Drive Auger- 8 Cu. Yd. 25:1 ratio	\$34,402.00
SSX-00000022	12ft SS V-Box-Dual Drive Auger- 9 Cu. Yd. 25:1 ratio	\$35,650.00
SSX-00000023	14ft SS V-Box Dual Drive Auger- 10 Cu. Yd. 25:1 ratio	\$41,113.00
Pre-Wet Options-All standard with in cab controls		
SSX-00000120	Electric 120 Gallon Tank, Behind Cab SS Mounted Pre-wet	\$9,430.00
SSX-00000105	Electric 105 Gallon Tailgate mount pre-wet system	\$7,475.00
SSX-00002105	Electric (2) 105 Gallon V-Box SS Mounted pre-wet system	\$6,325.00
SSX-00002400	Electric (2) 400 Gallon V-Box SS Mounted pre-wet system	\$8,970.00
SSX-00000030	Electric 30 Gallon Frame mount SS pre-wet system	\$6,325.00

Bucher V-BOX SPREADERS		
SSX-00000024	Bucher Taurus Spreader, 6 Yard Steel Standard	\$23,595.00
SSX-00000025	Bucher Taurus Spreader, 6 yard steel standard, With Pre-wet and unloading spreader leg system	\$29,328.00
SSX-00000026	Bucher Taurus Spreader, 10 yard Steel Standard	\$25,584.00
SSX-00000027	'Bucher Taurus Spreader, 10 yard steel standard, With Pre-wet and unloading spreader leg system	\$31,317.00



SOURCEWELL PETERBILT DEALER QUOTE/INVOICE TEMPLATE 2025 REVISION

PETERBILT MOTORS COMPANY SOURCEWELL CONTRACT # 032824

*DEALER TO FILL IN ALL GREY CELLS

OHIO PETERBILT		City of Broadview Heights	
		INSERT CUSTOMER SOURCEWELL MEMBERSHIP NUMBER	
PETERBILT MODEL		CHASSIS #	INSERT CHASSIS #
CAB & CHASSIS LIST PRICE		PETERBILT MODEL	SOURCEWELL DISCOUNT
SOURCEWELL DISCOUNT %		220/220EV	5.00%
SOURCEWELL DISCOUNT \$		MEDIUM-DUTY	
SOURCEWELL CAB & CHASSIS DISCOUNT		535 - 536 - 537 - 548	
ADDITIONAL DEALER DISCOUNT		15.00%	
TOTAL PRICE FOR ALL SOURCED GOODS/SERVICES AND APPLICABLE TAXES, FET, FLOORING, ETC.		HEAVY-DUTY	
BODY PRICE (IF APPLICABLE)		520 - 520EV - 567 - 579	
		- 579EV - 589	
		TOTAL PRICE FOR CAB & CHASSIS AND ALL SOURCED GOODS/SERVICES AND APPLICABLE TAXES AND FLOORING	
		548,162	
This quote is for a 2025 Cab & Chassis we have in stock. Stock number 755683			

PETERBILT
VMXXR036-1

CHASSIS FINAL BILL
FOR VIN 2NP8HJ8X0SM755683

PAGE 001
AS OF 09/13/24

UNIT TYPE 2
DEALER CODE - 0115
NAME AND ADDRESS
OHIO PETERBILT - COLUMBUS

CUSTOMER NO - UQAK
HENDERSON PRODUCTS
SA TWP PLOW CHASSIS

DATES
REQ DELV 09/10/24
DELIVERY 09/13/24
PRIC EFF 09/13/24

COLUMBUS OH 43228-3830
PREVIOUS CHASSIS NO.

THE FOLLOWING LIST DESCRIBES ALL COMPONENTS USED FOR THIS CHASSIS
DIMENSIONS AND WEIGHTS FOR THE ENTIRE ORDER ARE STATED IN CUSTOMARY.

APPLICATION

COMMODITY HAULED 0091200 OTHER COMMODITY

INTENDED SERVICE 0093150 SNOWPLOW

BODY

BODY TYPE 0095170 END DUMP

BODY LENGTH 120.00 IN BODY HEIGHT 162.00 IN
MAX LADEN WEIGHT 1000.00 LBS

TRAILER

TRAILER TYPE

TRAILER LENGTH .00 FT TRAILER HEIGHT .00 FT
KINGPIN .00 IN CTR LINE AXLE GRP .00 IN
CORNER RADIUS .00 IN NO TRAILER AXLES 00

OPERATING AREA RESTRICTIONS

LENGTH 40.00 FT WIDTH 102.00 IN HEIGHT 13.50 FT

**** DEALER ASSIGNED:

CHASSIS

FRONT AXLE LOAD 14600.00 LBS REAR AXLE LOAD 23000.00 LBS GCW 43000.00 LBS
WHEELBASE 154.00 IN FAX/BOC 69.50 IN CAB/AXLE 84.50 IN
CAB/EOF 144.50 IN MAXIMUM GRADE 06 PERCENT HIGHWAY 097 % CLASS B 003
% CLASS C 000
% CLASS D 000

UNIT TYPE 2
SPECIAL REQUIREMENTS
SPECIAL RESTRICTIONS 0098170 UNITED STATES REGISTRY

ENGINEERING ASSIGNED RATINGS

GAWR FRONT: 14,600.00 LBS
GAWR FIRST INTER 0.00 LBS SECOND INTER 0.00 LBS
GAWR REAR: 23,000.00 LBS
GVWR: 37,600.00 LBS

CODE	DESCRIPTION	PUB CD	PRICE	WEIGHT
-----	-----	-----	-----	-----
	BASE MODEL			
0005481	MODEL 548 MEDIUM DUTY	P	123,296	10,860
0200700	NOT APPLICABLE	P	0	0
	SECONDARY MANUFACTURER			
	FRAME AND EQUIPMENT			
0514000	10-3/4" STEEL RAILS TO 354" 3/8" RAIL THICKNESS	P	499	400
0611300	HD 5-PIECE CROSSMEMBER BOC IPO STANDARD CLASS 5, 6, 7	P	0	0
0611330	ZINC COATED ANTI CORROSION TREATED FRME RAILS - REQUIRES FRAME RAIL CODE	P	364	2
0611790	ALUMINUM FRAME RAIL CROSSMEMBERS EXCLUDES SUSPENSION	P	0	0
0612230	CUSTOM WHEELBASE OR OVERHANG	P	350	0
0613095	3-PIECE SUSPENSION CROSSMEMBERS	P	184	0
0620545	24" BUMPER EXTENSION, W/O ADAPTER	P	1,047	90
0644090	EOF SQUARE WITHOUT CROSSMEMBER USE WITH BODY BUILDER INSTALLED XMBER	P	0	0
0651090	OMIT REAR MUDFLAPS & HANGERS	P	77-	25-
	FRONT AXLE AND EQUIPMENT			
1012330	MERITOR MFS+14F 14,600 LB, 3.5" DROP	P	581	28-
1099990	FRONT AXLE APPROVED	U	0	0
N1090	* FRONT AXLE APPROVAL #151124 *			
1112150	TAPER LEAF SPRINGS, SHOCKS 14,600 LBS.	P	1	56
1243060	POWER STEERING SHEPPARD SD110	P	400	44
1250180	POWER STEERING RESERVOIR, FRAME MOUNTED	P	0	0
1354840	PHP10 IRON PRESET+ HUBS	P	0	0
1380070	GREASABLE FRONT SPRING PINS	P	130	0
1380470	MERITOR WIDE TRACK IPO STD, FRONT AXLE MFS+ 3.5" DROP / MFS 3.74"	P	0	15
1390710	MERITOR Q+ AIR CAM FRT DRUM BRKS 16.5X5 NOT RSD COMPLIANT	P	264	0
1391410	GUSSETED CAM BRACKETS, STEER AXLE	P	0	0
1391470	5 MM FRONT SPRING SPACER BLOCKS	U	0	0
	REAR AXLE AND EQUIPMENT			
1511110	MERITOR RS23-160 23,000 LB	P	0	0
1599980	REAR AXLE APPROVED	U	0	0
N1590	* REAR AXLE APPROVAL #151124 *			
1616300	PHP10 IRON PRESET+ HUBS	P	0	0
1680450	REAR BRAKE CAMSHAFT REINFORCEMENT	P	11	9
1680490	GUSSETED CAM BRACKETS, DRIVE AXLE(S)	P	30	2
1680500	SBM VALVE	P	0	0
1680750	MERITOR Q+ AIR CAM RR DRUM BRKS 16.5X7	P	519	0
1680795	DIFF LOCK, SINGLE DRIVE AXLE WITH SPEED INTERLOCK	P	1,732	30
1680950	STABILITY SYSTEM NOT SELECTED OR NOT AVAILABLE	P	0	0

CODE	DESCRIPTION	PUB CD	PRICE	WEIGHT
UNIT TYPE 2				
1682430	ANTI-LOCK BRAKING SYSTEM (ABS) 4S4M	P	0	0
1684200	SYNTHETIC AXLE LUBRICANT ALL AXLES	P	0	0
1705380	RATIO 5.38 REAR AXLE	P	0	0
1816040	REYCO 102AR, TR 23,000 LBS. 8.25" LOW MOUNT, SINGLE DRIVE	P	3,058	90-
ENGINE AND ENGINE EQUIPMENT				
2074806	PACCAR PX-9 350@2000 GOV@2200 1050@1200 PRODUCTIVITY (2024 EMISSIONS)	P	2,838	0
2091130	VMUX ELECTRONICS ARCHITECTURE	U	0	0
2091305	ENGINE IDLE SHUTDOWN TIMER ENABLED	P	0	0
2091315	ENABLE EIST AMBIENT TEMP OVERRULE	P	0	0
2091372	EFF EIST NA EXPIRATION MILES	U	0	0
2091640	EFFECTIVE VSL SETTING NA	U	0	0
2092015	TYPICAL OPERATING SPEED 70 MPH	P	0	0
2092032	POWERTRAIN OPTIMIZED FOR PERFORMANCE VOCATIONAL APPLICATIONS OR WITH HEAVY GCWR	P	0	0
2140460	REMOTE PTO/THROTTLE, 12-PIN, 250K, BOC/ BOS, J1939, REMOTE CONTROL PROVISION	P	0	0
2140670	EPA EMISSION WARRANTY	P	0	0
2140700	EPA ENGINE IDLING COMPLIANCE	P	0	0
N2132	C399 120...STANDARD MAXIMUM SPEED LIMIT			
N2133	C402 0....EXPIRATION DISTANCE (N207)			
N2134	C209 120...HARD MAXIMUM SPEED LIMIT (P1			
N2135	C121 64...MAXIMUM ACCELERATOR PEDAL VE			
N2137	C128 64...MAXIMUM CRUISE SPEED (P059)			
N2140	C400 252...RESERVE SPEED FUNCTION RESET			
N2141	C334 0....MAXIMUM CYCLE DISTANCE (N202			
N2142	C401 10...MAXIMUM ACTIVE DISTANCE (N20			
N2143	C333 0....RESERVE SPEED LIMIT OFFSET (
N2144	C234 NO...ENGINE PROTECTION SHUTDOWN (
N2145	C231 NO...GEAR DOWN PROTECTION (P026)			
N2146	C132 1400..MAX PTO SPEED (P046)			
N2147	C239 NO...CRUISE CONTROL AUTO RESUME (
N2148	C238 NO...AUTO ENGINE BRAKE IN CRUISE			
N2150	C395 0....EXPIRATION DISTANCE (N209)			
N2151	C225 YES...ENABLE IDLE SHUTDOWN PARK BR			
N2152	C133 5....TIMER SETTING (P030)			
N2153	C396 YES...ENABLE IMPENDING SHUTDOWN WA			
N2154	C397 60...TIMER FOR IMPENDING SHUTDOWN			
N2155	C206 35...ENGINE LOAD THRESHOLD (P516)			
N2157	C233 NO...IDLE SHUTDOWN MANUAL OVERRUL			
N2159	C382 YES...ENABLE HOT AMBIENT AUTOMATIC			
N2161	C188 39...LOW AMBIENT TEMPERATURE THRE			
N2162	C189 60...INTERMEDIATE AMBIENT TEMPERA			
N2163	C190 80...HIGH AMBIENT TEMPERATURE THR			
2513070	200 AMP ALTERNATOR, STANDARD BRUSH	P	184	0
2521090	IMMERSION TYPE BLOCK HEATER 110-120V SEE SALES TOOL DESC FOR PLUG LOCATION	P	105	2
2522110	PACCAR 12V STARTER N/A PACCAR MX ENGINES	P	0	0
2538120	3 PACCAR AGM 12V BATTERIES 2775 CCA	P	543	62
2539410	BATTERY JUMPER TERMINAL MTD UNDER HOOD LH FRAME RAIL	P	139	4
2539550	BATTERIES IN IN-CAB BATTERY BOX	P	0	0

UNIT TYPE 2

CODE	DESCRIPTION	PUB CD	PRICE	WEIGHT
2539720	LOW VOLTAGE DISCONNECT SYSTEM	P	0	0
2539860	BATTERY DISCONNECT SWITCH MOUNTED ON IN-CAB BATTERY BOX SEAT BASE	P	0	9
2621130	VARIABLE SPEED BELT DRIVEN FAN CLUTCH PX7/PX9/L9N	P	828	0
2723210	18.7 CFM AIR COMPRESSOR N/A X15	P	0	0
2812210	VGT EXHAUST BRAKE	P	0	0
2921110	PACCAR FUEL/WATER SEPARATOR STANDARD SERVICE INTERVAL	P	0	0
2921220	FUEL HEAT FOR FUEL FILTER	P	50	0
2921320	12V HEAT FOR FUEL FILTER	P	62	0
3114270	HIGH EFFICIENCY COOLING SYSTEM	P	0	0
3211140	(1) AIR CLEANER ENGINE MOUNTED	P	0	0
3281290	INSIDE/OUTSIDE AIR INTAKE CAB MOUNTED CONTROLS	P	755	2
3367160	EXHAUST SINGLE RH SOC DPF/SCR RH UNDER CAB, SINGLE MODULE	P	1,035	0
3381770	CURVED TIP STANDPIPE(S)	P	42	1
3387870	24" HT, 5" DIA STANDPIPE(S) CHROME WITH CLEAR COAT	P	268	0
TRANSMISSION AND CLUTCH				
4052920	ALLISON 3000 RDS-P TRANSMISSION, GEN 6 RUGGED DUTY SERIES	P	7,667	0
4099980	TRANSMISSION APPROVED	U	0	0
N4090	* TRANSMISSION APPROVAL #191647 *			
N4091	* T1 VOCATIONAL MODEL ACCEPTED PER			
N4092	TD180-2. *			
4210080	1710 HD DRIVELINE, 1 MIDSHIP BEARING	P	0	0
4230080	PTO F/O CHELSEA	P	0	0
4233910	(1) DASH MTD SINGLE ACTING EOH PTO CTRL ELECTRIC OVER HYDRAULIC	P	107	1
4240020	AUTOMATIC TRANSMISSION OIL COOLER VOCATIONAL HOOD ONLY	P	1,042	13
4250160	ALLISON WORLD TRANS PRIMARY SHIFT SCHEDULE 1	U	0	0
4250420	ALLISON HS/RDS, PKG 223 3000, 3500, 4000, 4500, 4700 TRANS	U	0	0
4251020	TC-421 TORQUE CONVERTER ALLISON TRANSMISSION	U	0	0
4252890	ALLISON FUELSENSE NOT DESIRED DYNAMIC SHIFT SENSING	P	0	0
4252940	ALLISON NEUTRAL AT STOP	P	0	0
4256640	ALLISON 6-SPEED CONFIGURATION 3000 SERIES TRANS, CLOSE RATIO GEARS	P	0	0
4256980	SEAT MOUNTED LEVER SHIFTER	P	1,680	4
4257110	LH MOUNTED TRANS PTO PROVISIONS	P	37	0
AIR AND TRAILER EQUIPMENT				
4510210	BENDIX AD-HF EP AIR DRYER, HEATER COALESCING FILTER, EXTENDED PURGE	P	251	0
4519130	MOUNT AIR DRYER INSIDE RAIL LH	P	0	0
4520420	PULL CORDS ALL AIR TANKS	P	5	0
4540420	NYLON CHASSIS HOSE	P	0	0
4543340	ALUMINUM PAINTED AIR TANKS	P	98	45-
4543530	CLEAR OUTSIDE FRAME OF ALL AIR SYSTEM COMPONENTS LH BOC	P	794	0

CODE	DESCRIPTION	PUB CD	PRICE	WEIGHT
UNIT TYPE 2				
5453540	CLEAR OUTSIDE FRAME OF ALL AIR SYSTEM COMPONENTS RH BOC	P	794	0
4610920	SELF RETURNING BRAKE HAND VALVE DASH MOUNTED CONTROLS	P	101	0
4611930	BODY CONNECTIONS 5' BOC	P	109	4
4612780	AE CONNECTION EOF, 7-WAY SOCKET 4' ADDL LINES, COILED & STRAPPED TO TIRES AND WHEELS	P	347	0
5004510	FF: CN 16PLY 12R22.5 HSR3	P	567	66
	PART: CN05124390000 FET: 74			
5104080	RR: CN 16PLY 11R22.5 HDC3 INCLUDES TPMS SENSOR	P	1,450	0
	PART: CN05652410000 FET: 116			
5190004	Code-rear Tire Qty 04		0	0
5220530	FF: ALCOA 89U647 22.5X9.00 HIGH POLISH ALM	P	499	14-
5320770	RR: ALCOA ULA187 22.5X8.25 HIGH POLISH ALM	P	850	0
5390004	Code-rear Rim Qty 04		0	0
5407640	FF: MIRROR POLISH WHEELS, OUTER SURFACE SGL OR TDM STEER, W/O CHROME WHEEL NUTS	P	66	0
5407650	RR: MIRROR POLISH WHEELS, OUTER SURFACE SGL DRIVE W/O CHROME WHEEL NUTS	P	253	0
5409680	SCHRADER DOUBLE SEALING EXTENSIONS ON TIRE VALVE STEMS	P	41	0
5410140	FF: DURA-BRIGHT FINISH OUTER SURFACE OF OUTER WHEEL	P	234	0
5410150	RR: DURA-BRIGHT FINISH SINGLE DRV; OUTER SURFACE OF OUTER WHEEL	P	234	0
FUEL TANKS				
5584040	D-SHAPED ALUM 50 GAL FUEL TANK LH U/C NON-SLIP STEP LH U/C	P	63	10-
5602050	LOCATION LH UNDER CAB 50 GAL			
5652900	DEF TANK MOUNTED LH U/C USE IN ADDITION TO DEF TANK OPTION	P	46	0
5652990	DEF TO FUEL RATIO 2:1 OR GREATER	P	0	0
5653000	POLISHED SS COVER FOR DEF TANK	P	194	0
5653270	FUEL TANK DRAIN PLUG	P	0	0
5655019	DEF TANK SMALL, HD 14GAL 2.1M MD 5.5GAL	P	0	0
BATTERY BOX AND BUMPER				
6010390	OMIT STANDARD BATTERY BOX USE WITH PASS SEAT/IN-CAB BAT BOX CODES	P	313-	44-
6040550	AFTERTREATMENT RH U/C ALUM NON-SLIP CAB ENTRY STEP	P	0	0
6121770	STEEL BUMPER TAPERED PAINTED 2 TOW POINTS, PAINTED SAME COLOR FRAME	P	439	40
CAB AND EQUIPMENT				
6510170	109" FEPTO HOOD W/STATIONARY GRILLE, 3PC METTON	P	5,425	15
6540160	THERMAL INSULATION PACKAGE IN CAB	P	68	2
6800180	HOOD CROWN - BRIGHT FINISH IPO MOLDED GRAY	P	89	0
6800340	FENDER LIPS 4" EXTRA WIDE	P	221	8
6914180	SEARS DRIVER SEAT	P	0	0
6924180	SEARS PASSENGER SEAT	P	0	0

CODE	DESCRIPTION	PUB CD	PRICE	WEIGHT
6930580	DRIVERS ARMRESTS - LH & RH	P	56	4
6931120	SEAT BELT COLOR ORANGE IPO STANDARD BLACK	P	10	0
6939100	BATTERY BOX UNDER PASSENGER SEAT	P	2,498	40
6939400	AIR RIDE DRIVER	P	0	0
6939420	HIGH BACK DRIVER	P	40	0
6939470	VINYL DRIVER	P	0	0
6939510	NON-AIR RIDE PASSENGER	P	0	0
6939530	MID BACK PASSENGER	P	0	0
6939570	VINYL PASSENGER	P	0	0
7000025	STEERING WHEEL W/MULTI FUNCTION WITH PB LOGO, AUDIO AND CC	P	239	4
7000045	HIGH-VISIBILITY INTERIOR GRABHANDLES PAINTED YELLOW	P	57	0
7000065	METAL INTERIOR DOOR PANEL KICK PLATES	P	47	2
7001520	ADJUSTABLE STEERING COLUMN TILT/TELESCOPE	P	0	0
7036140	PROBILT INT CHARCOAL GRAY-FLAT ROOF	P	0	0
7110680	EXTERIOR CAB ENTRY GRABHANDLE TEXTURED; NFPA COMPLIANT	P	179	0
7210420	DARK WINDOW TINT IPO STD - DAY CAB	P	22	0
7210540	DAY CAB REAR WINDOW	P	0	0
7210550	1-PIECE GLASS REAR CAB WINDOW FIXED	P	0	0
7230060	ONE-PIECE CURVED WINDSHIELD	P	0	0
7230360	POWER DOOR LOCKS AND POWER WINDOW LIFTS STANDARD	P	0	0
7322010	COMBO FRESH AIR HEATER/AIR CONDITIONER	P	0	0
7510060	AERO REAR VIEW MIRROR HOUSING BRIGHT FINISH	P	171	3
7514010	PETERBILT AERO REAR VIEW MIRROR MOTORIZED & HEATED W/INTEGRATED CONVEX	P	336	3
7514050	LOOK DOWN MIRROR OVER PASSENGER DOOR WITH BLACK HOUSING	P	0	0
7561490	LH/RH RECT CX HOOD MIRROR BLACK HSNG ARM BRIGHT FINISH, REARWARD VIEW	P	274	10
7610040	(1) AIR HORN ROUND, 26" LENGTH ROOF MTD, ROUND HORN SHIELD	P	152	4
7722120	CONCERTCLASS, AM/FM,WB, 3.5 AUX	P	353	11
7725710	STANDARD SPEAKER PACKAGE FOR CAB (2) SPEAKERS	P	51	4
7728030	RADIO MUTE WHEN AUTOMATIC OR AUTOMATED TRANSMISSION IN REVERSE	P	0	0
7728040	BLUETOOTH PHONE & AUDIO REQUIRES USB PORT	P	44	0
7728050	USB PORT	P	38	0
7788055	SMARTLINQ REMOTE DIAGNOSTICS	U	0	0
7850015	REAR WALL DEEP RECORD/MAP POCKET	P	127	2
7851480	PB ELEC WINDSHIELD WIPERS W/INTERMITTENT FEATURE	P	0	0
7852020	CAB AIR SUSPENSION	P	190	15
7852050	AUTO RESET CIRCUIT PROTECTION DAYCAB AND SLEEPER	P	19	0
7900090	TRIANGLE REFLECTOR KIT SHIP LOOSE	P	33	13
7900310	FIRE EXTINGUISHER, MTD OUTBOARD DRIVER SEAT	P	64	9

UNIT TYPE 2		PUB CD	PRICE	WEIGHT
CODE	DESCRIPTION			
7901140	BACKUP ALARM (87-112 DB) VARIABLE ADJUSTING	P	44	6
8011850	TRANSMISSION OIL TEMPERATURE (MAIN) LOCATED IN DIGITAL CLUSTER DISPLAY	P	30	0
8021380	AIR RESTRICTION INDICATOR MTD ON AIR CLEANER, INTAKE PIPING, OR FIREWALL	P	0	0
8021630	GENERAL AIR PRESSURE 1 GAUGE 52MM ROUND, BACKLIT	P	185	0
8041200	DUAL SCALE SPEEDOMETER MPH OVER KPH	P	0	0
8070000	DISABLE BRAKE LIGHT WITH ENGINE BRAKE	P	0	0
8070250	SWITCH AND WIRING FOR F/O SNOW PLOW LIGHT INSTALLATION	P	203	0
8070390	ENGINE HOURMETER GAUGE LOCATED IN DIGITAL CLUSTER DISPLAY	P	0	0
8070810	ENGINE MANIFOLD PRESSURE (TURBO BOOST) LOCATED IN DIGITAL CLUSTER DISPLAY	P	0	0
8070820	ENGINE PERCENT TORQUE LOCATED IN DIGITAL CLUSTER DISPLAY	P	0	0
8070860	MAIN INSTRUMENTATION PANEL DIGITAL CLUSTER 7" DISPLAY	P	0	0
8070940	VOLTMETER GAUGE (MD/520 ONLY) LOCATED IN DIGITAL CLUSTER DISPLAY	P	0	0
8071470	ABS OFF-ROAD SWITCH	P	94	0
8071900	MANIFOLD PRESSURE GAUGE 52MM ROUND, BACKLIT	P	53	2
8076080	(2) ADDITIONAL DASH SWITCHES, WIRING AT BOC/BOS	P	207	1
8111110	HEADLIGHTS COMPOSITE FENDER MOUNTED INTEGRAL DRL/PARK, TURN, & SIDE MARKER	P	0	0
8120980	(5) MARKER LIGHTS, AERO LED	P	0	0
8133110	SWITCH & WIRING F/O AUXILIARY LIGHT UNDER CAB/SLEEPER (15A MAX)	P	64	2
8133450	(2) BRACKETS F/O BEACON/STROBE, ROOF MTD ABOVE EA DOOR TOWARD REAR, SW & WIRING	P	296	4
8133900	NONE FURNISHED STOP/TAIL/BACKUP	P	40-	16-
8134160	SELF-CANCELING TURN SIGNAL	P	0	0
8134180	DAYTIME RUNNING LIGHTS, MTD IN BUMPER DRIVEN BY CHASSIS HEIGHT	P	194	0
8153100	(1) F/O LOAD LIGHT, SWITCH, 10' WIRE COIL UNDER/IN CAB/SLEEPER	P	59	2
PAINT				
8500710	STANDARD PAINT COLOR SELECTION	P	200-	0
8530770	(1) COLOR AXALTA TWO STAGE PAINT CAB/HOOD	P	0	0
N8502	A - L0006EY WHITE			
N8520	FRAME L0001EA BLACK			
N8530	FENDER L0006EY WHITE			
N8540	HOOD TOP L0006EY WHITE			
N8550	CAB ROOF L0006EY WHITE			
N8570	BUMPER L0001EA BLACK			
MISCELLANEOUS				
9409046	109" STATIONARY GRILLE HOOD (MODEL 548)	P	0	0
9409085	STATE REGISTRY: OHIO	P	0	0
9409749	2024 SERIES EMISSIONS ENGINE WARRANTY ONLY	P	0	0

CODE	DESCRIPTION	PUB CD	PRICE	WEIGHT
9409843	PETERBILT SOURCEWELL PROGRAM CODE	P	0	0
9490055	APPLICATIONS CONTACT: CARLOS VILLALOBOS (940) 591-4244	U	0	0
N9994	EMAIL: JKRAUSS@OHIOPETERBILT.COM			
N9995	CELL PHONE: 6142078218			
N9996	SALESPERSON ID: JOHN KRAUSS			
N9997	DEALER CONTACT			
N9998	NAME: JOHN KRAUSS PH: (614)875-3732			
N9999	CRV 07/16/24 OC005			
	** TOTAL ESTIMATED WEIGHT			11,610
	TOTAL LIST PRICE		168,885	
	BELOW CHARGES NOT INCLUDED IN TOTAL LIST PRICE			
	ADJUSTED LIST PRICE		168,885	
PROMOTION PROGRAM CODE	0000000 @ 0.00 %			0
COMPETITIVE ALLOWANCE NO	01696435 @ 0.00 %			0
SURCHARGE/OPTIONS NO DISC				
9408634	- SMARTLINQ RD - 5YR SUB PACCAR PX ENGINES			799
9408703	- BASE WARR: EMISSIONS 5YR/100K MI-EPA ENGINE			0
9408931	- PDI AT EXCELLENCE PETERBILT LOCATION			230
	TOTAL SURCHARGE/OPTIONS NOT SUBJECT TO DISC			1,029
	OPTIONAL EXT WTY & PRV MNT			
9400091	- PETERBILT CLASS 7 STANDARD COVERAGE 1 YEAR/UNLIMITED MILES/KM			0
9400094	- PACCAR PX-9 STANDARD COVERAGE 2 YRS/250,000 MI (402,336 KM)/6,250 HRS			0
	TOTAL OPTIONAL EXT WTY & PRV MNT			0
	TOTAL TIRE FET INCLUDED -- AS PRODUCED			190
MRKTG PROGS, PROMOS, SERVICE & TECHNOLOGY				1,395
** WEIGHT SHOWN HERE IS AN ENGINEERING ESTIMATE AND DOES NOT INCLUDE UNPUBLISHED OPTIONS. ACTUAL "SHIPPING" WEIGHT MAY VARY.				
SHIP CD	: ISD0004			
DLR/BUS	: PDI At Excellence			
ADDRESS1	: 4205 Autoroute Chomedey			
ADDRESS2	:			
CITY	: Laval	ST:	QC	ZIP/PSTL: H7P OA8
CONTACT	: ISD0004-PDI			
PH	:			
CTRY	: US			
SHIP CD	: FNLDEST			
DLR/BUS	: Henderson Products			
ADDRESS1	: 2177 Ohio SR 19			
ADDRESS2	:			
CITY	: Bucyrus	ST:	OH	ZIP/PSTL: 44820
CONTACT	: Chassis Receiver			
PH	: 4196177509			
CTRY	: US			